




Advanced Sealing

13452 Alondra Blvd.
Cerritos, CA 90703
Ph: 562-802-7782
Fax: 562-802-7782

3803 Old Mobile Hwy
Pascagoula, MS 39581
Ph: 228-938-8000
Fax: 228-938-0011

Paddle Blinds & Spec Blinds

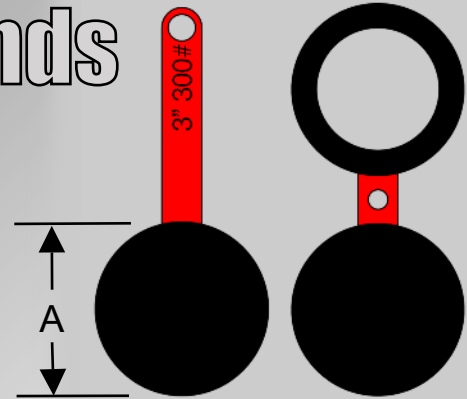

Line Size	Blind OD (Inches) Handle color-coded as shown				
	150#	300#	600#	900#	1500#
1/2"	1 3/4	2	2	2 3/8	2 3/8
3/4"	2 1/8	2 1/2	2 1/2	2 5/8	2 5/8
1"	2 1/2	2 3/4	2 3/4	3	3
1 1/4"	2 7/8	3 1/8	3 1/8	3 3/8	3 3/8
1 1/2"	3 1/4	3 5/8	3 5/8	3 3/4	3 3/4
2"	4	4 1/4	4 1/4	5 1/2	5 1/2
2 1/2"	4 3/4	5	5	6 3/8	6 3/8
3"	5 1/4	5 3/4	5 3/4	6 1/2	6 3/4
3 1/2"	6 1/4	6 3/8	6 1/4	—	—
4"	6 3/4	7	7 1/2	8	8 1/8
5"	7 5/8	8 3/8	9 3/8	9 5/8	9 7/8
6"	8 5/8	9 3/4	10 3/8	11	11
8"	10 7/8	12	12 1/2	14	13 3/4
10"	13 1/4	14 1/8	15 5/8	17	17
12"	16	16 1/2	17 5/8	19 1/2	20 3/8
14"	17 5/8	19	19 1/4	20 3/8	22 5/8
16"	20 1/8	21 1/8	22 1/8	22 1/2	25 1/8
18"	21 1/2	23 3/8	24	25	27 5/8
20"	23 3/4	25 5/8	26 3/4	27 3/8	29 5/8
22"	25 7/8	27 5/8	28 3/4	—	—
24"	28 1/8	30 3/8	31	32 7/8	35 3/8
26"	30 3/8	32 3/4	34	34 5/8	—
28"	32 5/8	35 1/4	35 7/8	37 1/8	—
30"	34 5/8	37 3/8	38 1/8	39 5/8	—
32"	36 7/8	39 1/2	40 1/8	42 1/8	—
34"	38 7/8	41 1/2	42 1/8	44 5/8	—
36"	41 1/8	43 7/8	44 3/8	47 1/8	—
38"	43 5/8	41 3/8	43 3/8	47 1/8	—
40"	45 5/8	43 3/4	45 3/8	49 1/8	—
42"	47 7/8	45 3/4	47 7/8	51 1/8	—
44"	50 1/8	47 7/8	49 7/8	53 3/4	—
46"	52 1/8	50	51 7/8	56 3/8	—
48"	54 3/8	52	54 5/8	58 3/8	—

Blinds for isolation are made to a standard thickness of 5/16" (+/- 1/16") unless otherwise specified, and are not intended for pressurized services or hydrotests.

Dimensions per ASME B16.48, API 590, and ASME B16.5

Blinds for hydrotests can be provided with thickness per API and ASME specifications.

For more information, contact your Advanced Sealing representative.

Boilermaker Blinds also available.

Specify when ordering:

- Line Size
- Flange Rating
- Thickness
- Quantity

Dimensions for 26" and larger per ASME B16.47 Series "A" (MSS SP44).

ASME B16.47 Series "B" are available on request.

Line sizes up to 96" are available.